




—
your partner
in sensor
technology.

+ Datasheet EE820

CO₂ Sensor for Demanding Applications

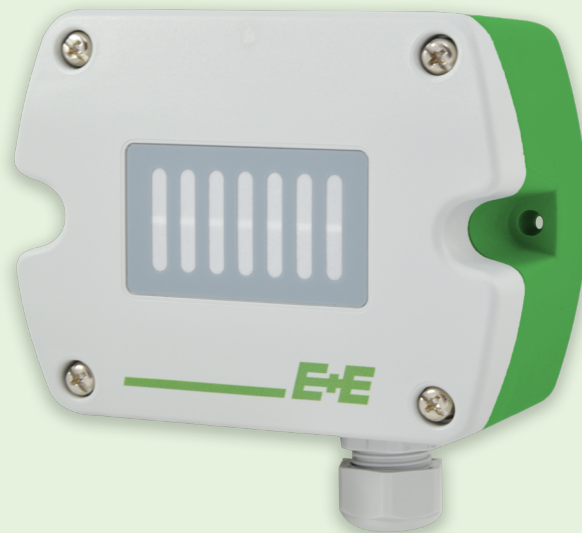

EE820

CO₂ Sensor for Demanding Applications

The EE820 CO₂ sensor is optimized for use in harsh, demanding applications, such as hatchers, incubators, life stock barns or greenhouses.

Outstanding Accuracy

A multiple point CO₂ and temperature factory adjustment procedure leads to excellent CO₂ measurement accuracy over the entire temperature working range, so the EE820 can even be installed outdoors.

Long-term Stability

The EE820 incorporates the E+E dual wavelength NDIR CO₂ sensor, which compensates for ageing effects, is highly insensitive to pollution and offers outstanding long term stability.

High Resistance to Pollution

With its robust, functional IP54 enclosure with a special filter the EE820 can be employed even in harsh environment.

Analogue Output

The CO₂ measured data with range up to 10 000 ppm is available on the analogue output (voltage/current).

Easy Configuration and Adjustment

An optional adapter and the free PCS10 Product Configuration Software facilitate the configuration and adjustment of the EE820.



EE820 with cable gland




EE820 with M12x1 plug

Features

External mounting holes

- Easy and fast mounting with closed cover
- Electronics protected against construction site pollution

Knockout for 1/2" conduit fitting (US)

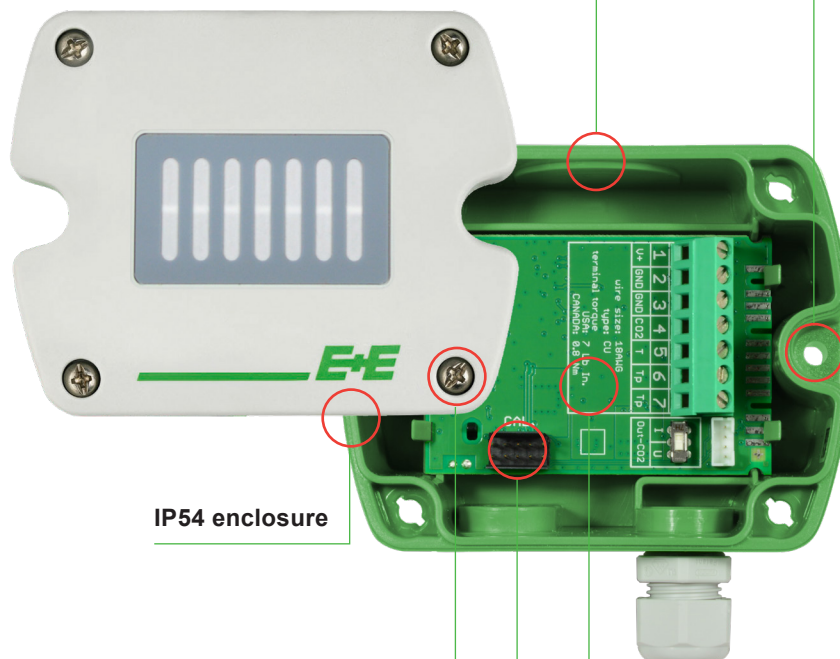

IP54 enclosure

Bayonet screws

- Opened/closed with a 1/4 rotation

Electronics

- Optimum protection against mechanical damage during installation
- CO₂ auto-calibration
- Temperature compensation
- Excellent resistance to pollution

Service interface for configuration and adjustment


Test Report

According DIN EN 10204-2.2


Dimensions

Values in mm (inch)

EE820 with cable gland

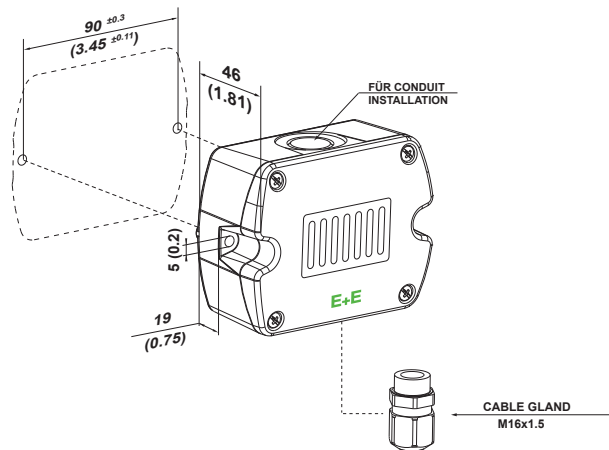

EE820 with plug



Tecnical Data

Measurands

CO₂

Measurement principle	Dual wavelength non-dispersive infrared technology (NDIR)
Measuring range	0...2000/5000/10000 ppm
Accuracy @ 25 °C (77 °F) and 1013 mbar (14.7 psi)	<p>0...2000 ppm < ±(50 ppm + 2 % of measured value)</p> <p>0...5000 ppm < ±(50 ppm + 3 % of measured value)</p> <p>0...10000 ppm < ±(100 ppm + 5 % of measured value)</p>
Temperature dependency in the range of -20...45 °C (-4...113 °F)	<p>±(1 + CO₂ concentration [ppm] / 1000) ppm/°C</p> <p>± 0.556 * (1+ CO₂ concentration [ppm] / 1000) ppm/°F</p>
Response time t ₆₃ , typ.	300 s
Sampling interval , approx.	15 s




Outputs

Analogue

CO ₂	0...2000/0...5000/0...10000 ppm	0 - 10 V 4 - 20 mA	-1mA < I _L < 1 mA R _L ≤ 500 Ω	I _L = load current R _L = load resistance
-----------------	---------------------------------	-----------------------	--	---

Technical Data

General

Power supply class III  USA & Canada: Class 2 supply necessary, max. voltage 30 V DC	24 V AC ±20 % 15 - 35 V DC
Current consumption , typ.	15 mA + output current
Peak current , max. @ analogue output	350 mA for 0.3 s
Warm-up time ¹⁾	< 5 min
Electrical connection	Screw terminals max. 2.5 mm ² or M12 plug
Working conditions	-20...+60 °C (-4...+140 °F) 0...100 %RH, non-condensing
Storage conditions	-20...+60 °C (-4...+140 °F) 0...95 %RH, non-condensing
Enclosure Material Protection rating	Polycarbonate (PC), UL94 V-0 approved IP54
Electromagnetic compatibility	EN 61326-1 EN 61326-2-3 Industrial environment FCC Part15 Class B ICES-003 Class B
Conformity	 
Configuration and adjustment	PCS10 Product Configuration Software (free download) and configuration adapter

1) For performance according to specification.

Ordering Guide

Feature	Description	Code		
Hardware Configuration		EE820-		
	CO ₂ measuring range	0...2000 ppm	HV1	
		0...5000 ppm	HV2	
		0...10000 ppm	HV3	
	Analogue output	0 - 10 V	A3	
		4 - 20 mA	A6	
	Electrical connection	M16x1.5 cable gland	E1	
		M12 connector, 4 poles		E9
Accessories	No accessories		AC0	
	M12x1 cable socket, for self assembly		AC2	

Order example


EE820-HV2A6E1AC0

Feature	Code	Description
CO ₂ measuring range	HV2	0...5000 ppm
Analogue output	A6	4 - 20 mA
Electrical connection	E1	M16 cable gland
Accessories	AC0	No accessories

Accessories

For further information please refer to the [Accessories](#) datasheet.

Description	Code	
USB configuration adapter	HA011066	
E+E Product Configuration Software (Free download: www.epluse.com/pcs10)	PCS10	
Connection cable M12x1 socket - flying leads	1.5 m (3.3ft)	HA010819
	5 m (16.4 ft)	HA010820
	10 m (32.8 ft)	HA010821
Protective cap for M12 socket	HA010781	
Protective cap for M12 plug	HA010782	
Power supply adapter	V03	

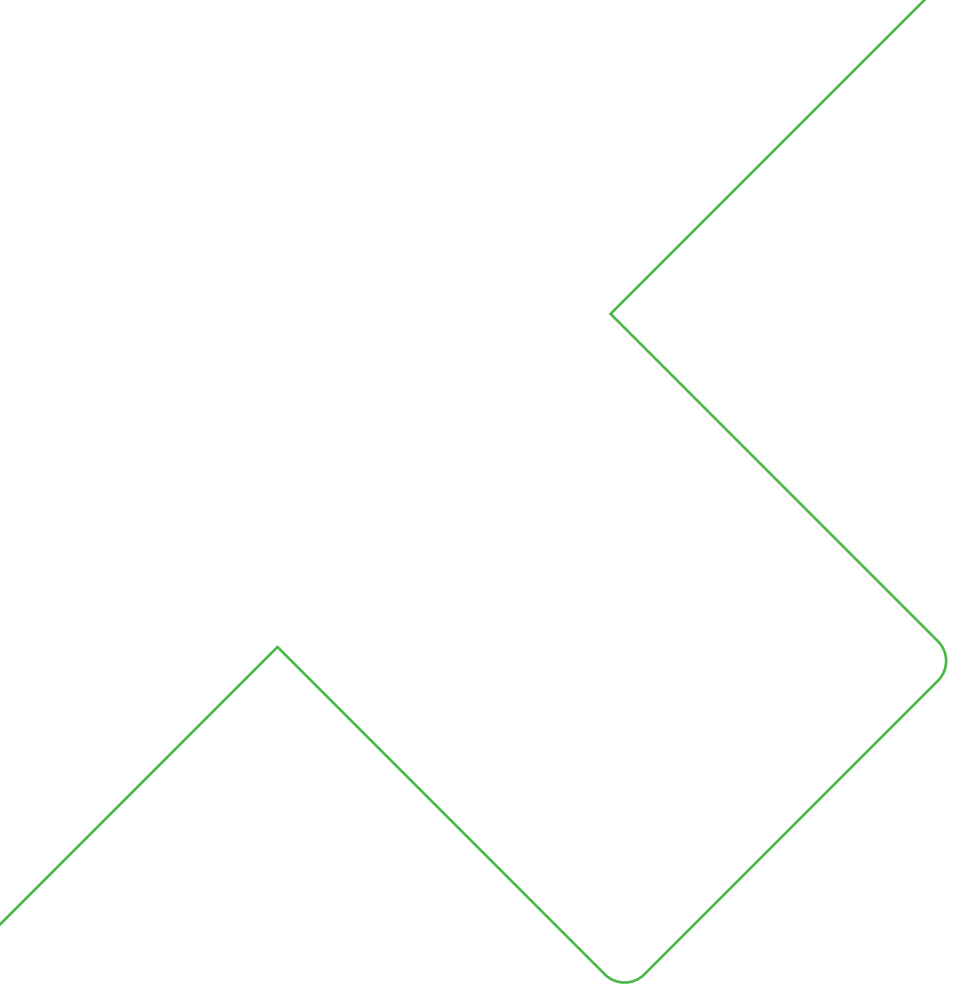

Company Headquarters &
Production Site

E+E Elektronik Ges.m.b.H.
Langwiesen 7
4209 Engerwitzdorf | Austria
T +43 7235 605-0
F +43 7235 605-8
info@epluse.com
www.epluse.com

Subsidiaries

E+E Sensor Technology (Shanghai) Co., Ltd.
T +86 21 6117 6129
info@epluse.cn

E+E Elektronik France SARL
T +33 4 74 72 35 82
info.fr@epluse.com

E+E Elektronik Deutschland GmbH
T +49 6171 69411-0
info.de@epluse.com

E+E Elektronik India Private Limited
T +91 990 440 5400
info.in@epluse.com

E+E Elektronik Italia S.R.L.
T +39 02 2707 86 36
info.it@epluse.com

E+E Elektronik Korea Ltd.
T +82 31 732 6050
info.kr@epluse.com

E+E Elektronik Corporation
T +1 847 490 0520
info.us@epluse.com



—
your partner
in sensor
technology.